


Kenwood Transceiver CAT (Computer Aided Tuning) Cable (ACC-1 DIN Serial Connector to PC Standard DB9)

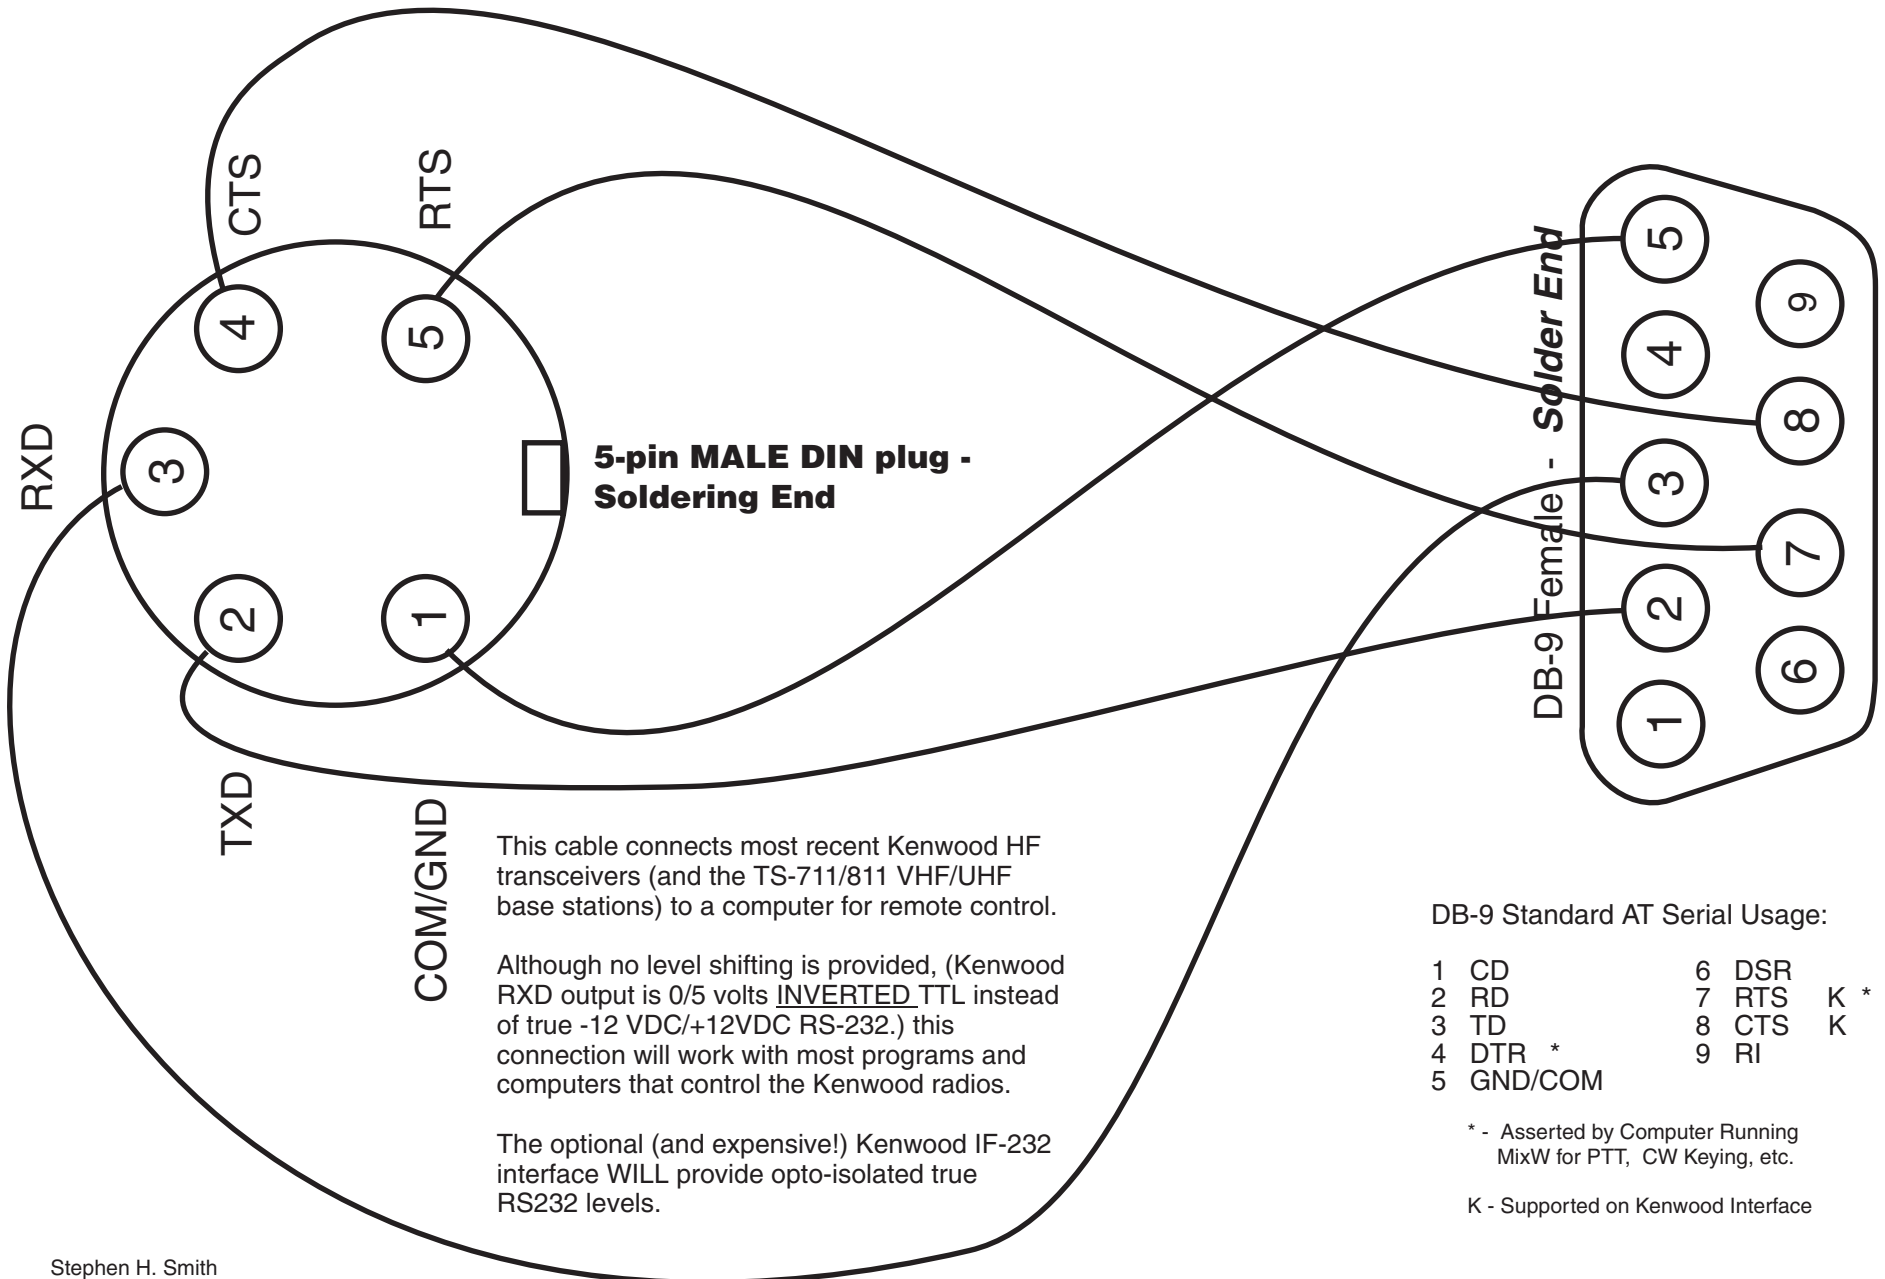

This cable connects most recent Kenwood HF transceivers (and the TS-711/811 VHF/UHF base stations) to a computer for remote control.

Although no level shifting is provided, (Kenwood RXD output is 0/5 volts INVERTED TTL instead of true -12 VDC/+12VDC RS-232.) this connection will work with most programs and computers that control the Kenwood radios.

The optional (and expensive!) Kenwood IF-232 interface WILL provide opto-isolated true RS232 levels.

DB-9 Standard AT Serial Usage:

1	CD	6	DSR	
2	RD	7	RTS	K *
3	TD	8	CTS	K
4	DTR *	9	RI	
5	GND/COM			

* - Asserted by Computer Running MixW for PTT, CW Keying, etc.

K - Supported on Kenwood Interface